


ZEVO 600 / THE ACTUAL PROPORTIONS

REV 2 | Every orthographic view uses the SAME 7 pixels per inch in both directions.

GM 2025 manual p12: published cargo envelope. Finish allowances and furniture remain proposed.

TOP / CARGO LENGTH 168.9 in

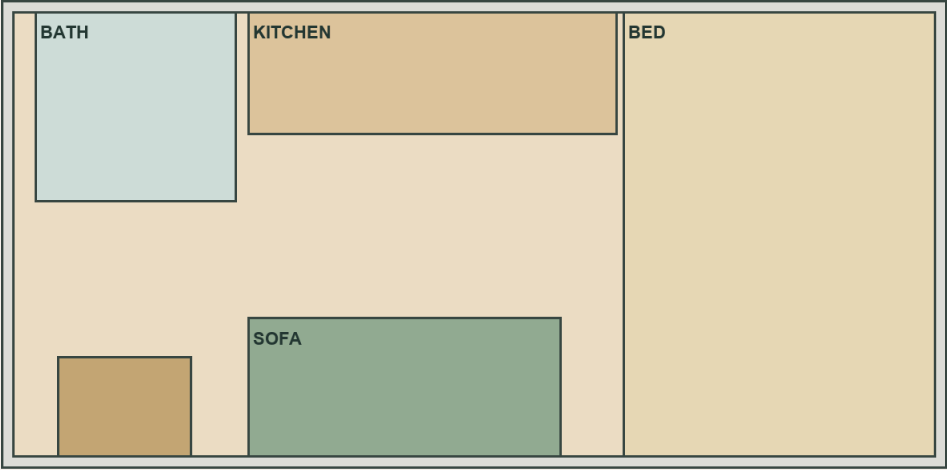

WIDTH 83.68 in | raw L : W = 2.018 : 1
Finished inset: 164.9 × 79.68 in | L : W = 2.070 : 1


THE VISUAL ERROR

The old cutaway shortened the length axis relative to width. It was not a true equal-axis isometric projection.

Rev 2 gives all three 3D axes the same projected unit length. The floor plan above is undistorted: no perspective.


This is the cargo box, NOT the entire van.
The cab is not included in 168.9 inches.

DRIVER-SIDE ELEVATION / 168.9 × 82 in

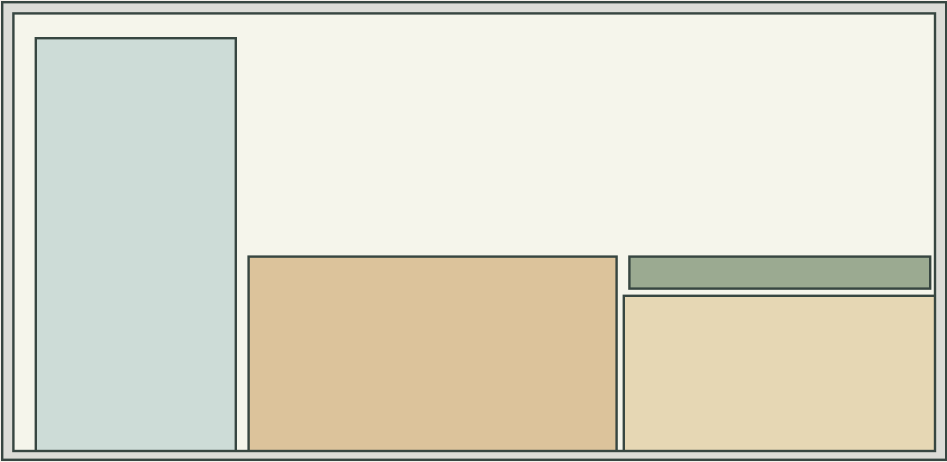

Finished height: 78.5 in, before local hardware intrusions.

CROSS SECTION / same scale

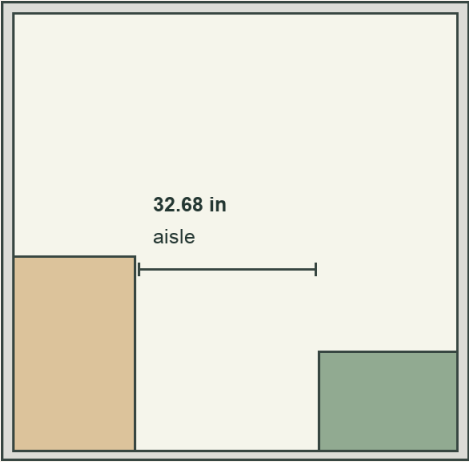

83.68 wide × 82 high

CARGO LENGTH IS NOT OVERALL VEHICLE LENGTH



Whole Zevo 600: 290 in overall length (GM p12)



Cargo envelope: 168.9 in long (GM p12); bars compare length only, not position.

Door-closed 82 in height shown. GM also gives 76 in with rear door open; local extent needs measurement.


No factory pillar, door-position, wheelwell-position, structural or escape-route approval is implied.

PROPORTION REFERENCE / CONCEPT FURNITURE / NOT A FABRICATION TEMPLATE

BRIGHTDROP 600

01 / DIMENSIONED INTERIOR PLAN

PROVISIONAL FINISHED BOX • 79.68 W × 164.90 L × 78.50 H inches
GM 2025 manual p12 verified. Finished shell, entry position and equipment remain unverified.

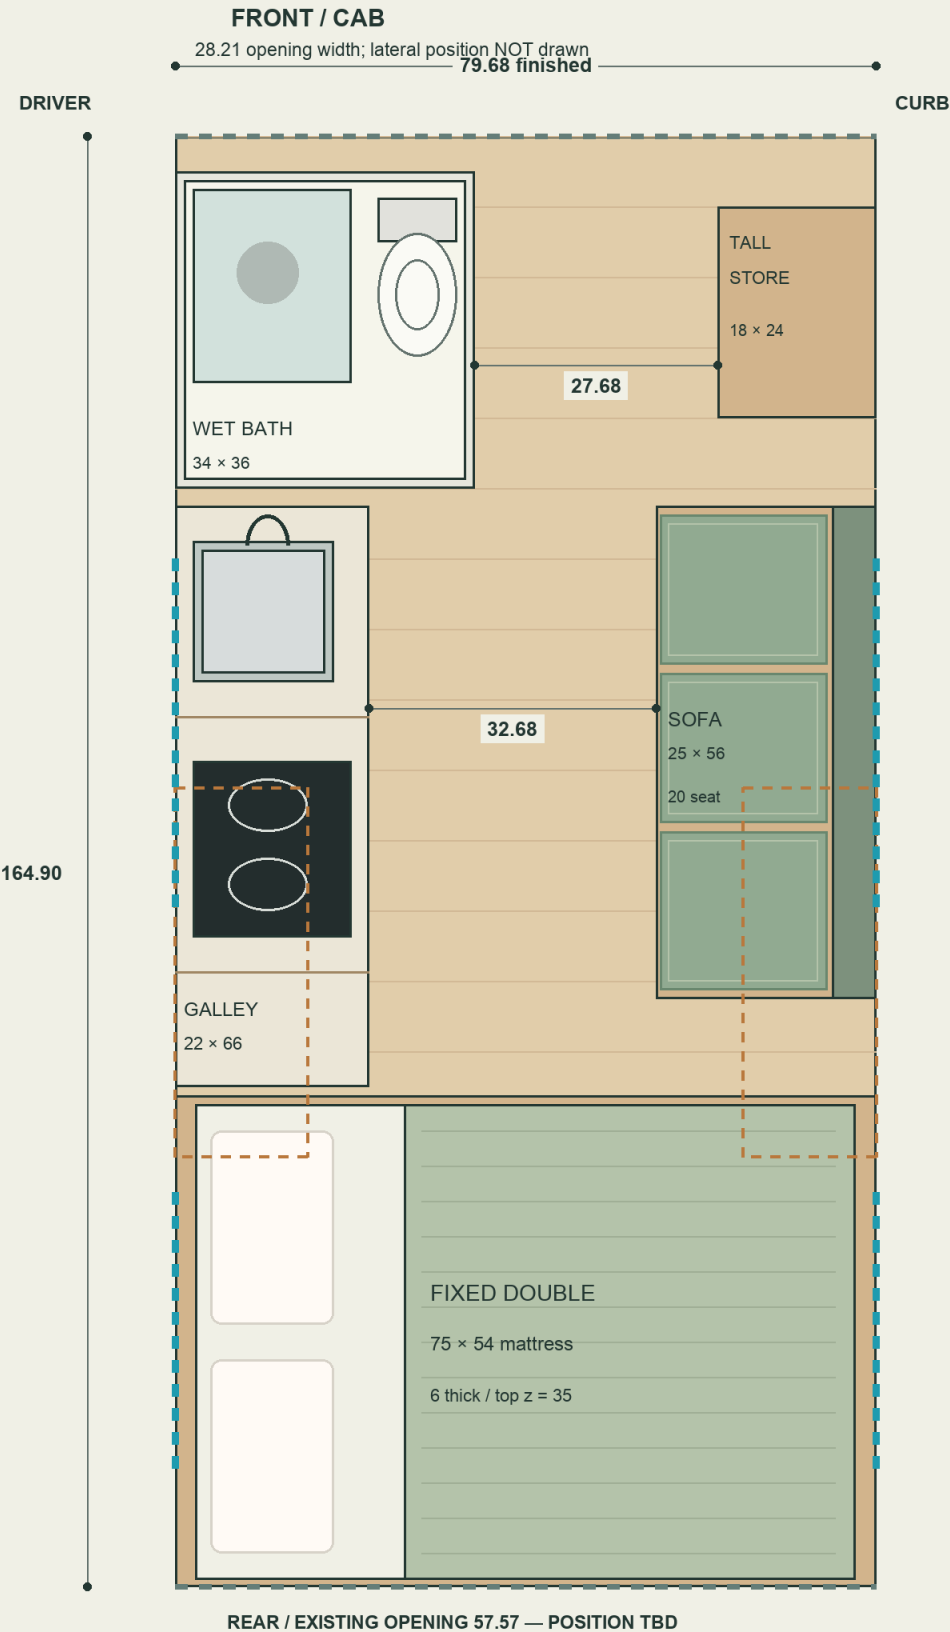

01 ENTRY + BATH

27.68 aisle beside front wardrobe: constrained.
Bath may obstruct real entry: survey required.
Thin-wall wet bath; shower + compact toilet.
Sliding bath closure proposed; SKU/sweep TBD.

02 ONE-PERSON KITCHEN

32.68 clear between galley and sofa envelopes.
Fridge below sink at y42–66; no wheelwell clash in this schematic. Dry electrics y96–108, raised above wheelwell; plumbing separated.

03 PETS + STORAGE

Open dog cubby beneath forward sofa seat.
Rear sofa base must bridge schematic wheelwell.
Luggage lockers above galley, z64–77.
Cat compartment beneath bed via forward riser.

04 BED + REAR GARAGE

Frame envelope 79.68 × 55.90; top z28.
Mattress x2.34–77.34 / y110–164 / z29–35.
2.34 each side; only 1.0 front / 0.9 rear slack.
Water and rear-access garage are separate bays.

05 UNVERIFIED SHELL FEATURES

Cyan dashes = window candidates, not cut lines.
Amber dashes = wheelwell zones, z0–15.
No side cargo door assumed. No inferred pillars.
Doors/drawers and knee space need full-size test.

RAW → FINISHED / inches

Width 83.68 – 2 – 2 = 79.68
Length 168.90 – 2 – 2 = 164.90
Height 82.00 – 1.5 – 2 = 78.50
Finish stacks are allowances, not assemblies.
GM source: 2025 manual p12, 600 columns.

FIXED BED BLOCKS REAR WALKOUT

A verified escape route is required. Front entry fit is also unresolved. Do not cut from this drawing.
Plausible nominal layout only: verify shell, equipment operation, payload, tanks, restraints and attachments.

ZEVO 600 — CORRECTED EQUAL-AXIS ISOMETRIC

02 / REV 2 • LENGTH, WIDTH AND HEIGHT SHARE THE SAME PROJECTED SCALE

Provisional 79.68 × 164.90 × 78.50 in finished shell. Roof / near walls removed for visibility.

COMPACT WET BATH

Shower tray + toilet; 74 high.
Near wall cut low in this view.

FRONT WARDROBE

18 deep × 24 long × 70 high.
Entry opening position unverified.

SAGE SOFA + DOG NOOK

56 long; 20 cushion + 5 back.
Open cubby only ahead of wheelwell.

CYAN = CANDIDATE WINDOWS

Ghost glazing, not approved openings.
No factory pillars inferred.

BIRCH / IVORY GALLEY

Sink, induction, undercounter fridge.
Overhead luggage + dry electrical bay.

FIXED BED / REAR GARAGE

75 × 54 × 6 mattress; top z35.
Rear garage reached from outside.

SEPARATED UNDER-BED BAYS

Cat entry through forward riser.
Water separated; mass balance TBD.

VERIFIED EQUAL-AXIS PROJECTION / MODEL LENGTH : WIDTH = 2.070 : 1

View uses inch-based model geometry, not prompt-generated imagery. Finished wall lining is schematic; roof and near walls omitted.
Bath/cabinet operation, fridge ventilation, toilet use, travel restraints and actual wheelwell locations require physical verification.
The bed frame envelope is wall-to-wall, not a zero-tolerance cut length. Mattress end slack is 1.0 / 0.9 in: mock-up required.

CONCEPT ONLY / FIXED BED BLOCKS REAR WALKOUT

Rear escape and front entry require verification. No side cargo door assumed. No engineered attachment or payload approval.
Source: GM 2025 BrightDrop400/600 Body Builder Manual p12, 600 columns. Finishes, furniture and window zones proposed.

What fits. What still needs the van.

GM envelope verified; furniture, finishes and window zones are design assumptions.

01 / REAL GM BASELINE

2025 manual, page 12 / 600 FWD and AWD

Cargo: 168.9 long x 83.68 wide

Height: 82 closed / 76 with door open

Between wheel housings: 53.53

Bulkhead opening: 28.21 x 75.81

Rear opening: 57.57 x 73.44

02 / FINISHED DESIGN ENVELOPE

Assume 2 in at each side and each end

Assume 1.5 in floor + 2 in ceiling

Result: 164.9 long x 79.68 wide

Nominal closed-door headroom: 78.5

Not a survey of taper, ribs or door travel

All dimensions on this sheet are inches

03 / EVERYDAY USE

Galley vs sofa: 32.68 clear aisle

Single-person work zone; passing constrained

18 in open drawer leaves only 14.68

Front bath vs wardrobe: 27.68 aisle

A 12 in deep wardrobe would give 33.68

Bed: 75 x 54 full-size, not a queen

2.34 nominal slack at each mattress end

Rear sleeper may climb past front sleeper

Sofa is parked seating, not travel seating

04 / DO NOT TURN THIS INTO CUT LINES

Fixed rear bed blocks normal rear walk-out.

Resolve and verify emergency egress.

Window zones are candidates, not cutouts.

Verify real pillars, wiring and body approval.

Wheelwell stations and height are unverified.

Verify front door position and pocket travel.

Route drains without assumed drilling rights.

Keep service covers and dry electrical access.

Verify loaded weight and each axle rating.

CHEVROLET BRIGHTDROP 600 DIMENSIONS

All dimensions in inches (mm) unless otherwise stated.				
		Specifications	CJ32905 600 FWD	CM32905 600 AWD
	A	Wheelbase	183 (4660)	183 (4660)
	B	Overall length	290 (7366)	290 (7366)
	C	Vehicle width (with mirrors)	106.2 (2697)	106.2 (2697)
		Vehicle width (without mirrors)	86.52 (2198)	86.52 (2198)
	D	Overall height	108.87 (2765)	108.79 (2763)
		Overall height with shark fin antenna	109 (2769)	109 (2769)
		Overall height with mast antenna	117.57 (2986)	117.57 (2986)
		Ground clearance	7.51 (191)	7.51 (191)
		Overhang, front	33.99 (863)	33.99 (863)
		Overhang, rear	72.57 (1843)	72.57 (1843)
		Internal cargo area length	168.9 (4290)	168.9 (4290)
		Internal cargo area width, wall to wall	83.68 (2125)	83.68 (2125)
		Internal cargo area width, between wheel housing	53.53 (1360)	53.53 (1360)
		Internal cargo area height with door closed	82 (2083)	82 (2083)
		Internal cargo area height with door open	76 (1930)	76 (1930)
		Bulkhead access with door open (width)	28.21 (717)	28.21 (717)
		Bulkhead access with door open (height)	75.81 (1926)	75.81 (1926)
		Rear cargo access with door open (width)	57.57 (1462)	57.57 (1462)
		Rear cargo access with door open (height)	73.44 (1865)	73.44 (1865)
		Curbside door opening width	36.67 (931)	36.67 (931)
		Curbside step, height to ground	15.49 (393)	15.49 (393)